



Thermoflo

**90%
AFUE**

GAS FURNACES


DOWN-FLOW / HORIZONTAL APPLICATIONS

Standard Features:


- 90%+ AFUE Efficiency With Weldless Tubular Heat Exchanger
- Self Diagnosing Control System
- Patented High Temperature Limit System
- Easy Service Access With No Door Switches
- Power Terminals Provided For Humidifier And Electronic Air Cleaner
- 20 - Year Limited Heat Exchanger Warranty
- 5 - Year Limited Parts Warranty



GAS FURNACES



ALL DIMENSIONS IN INCHES

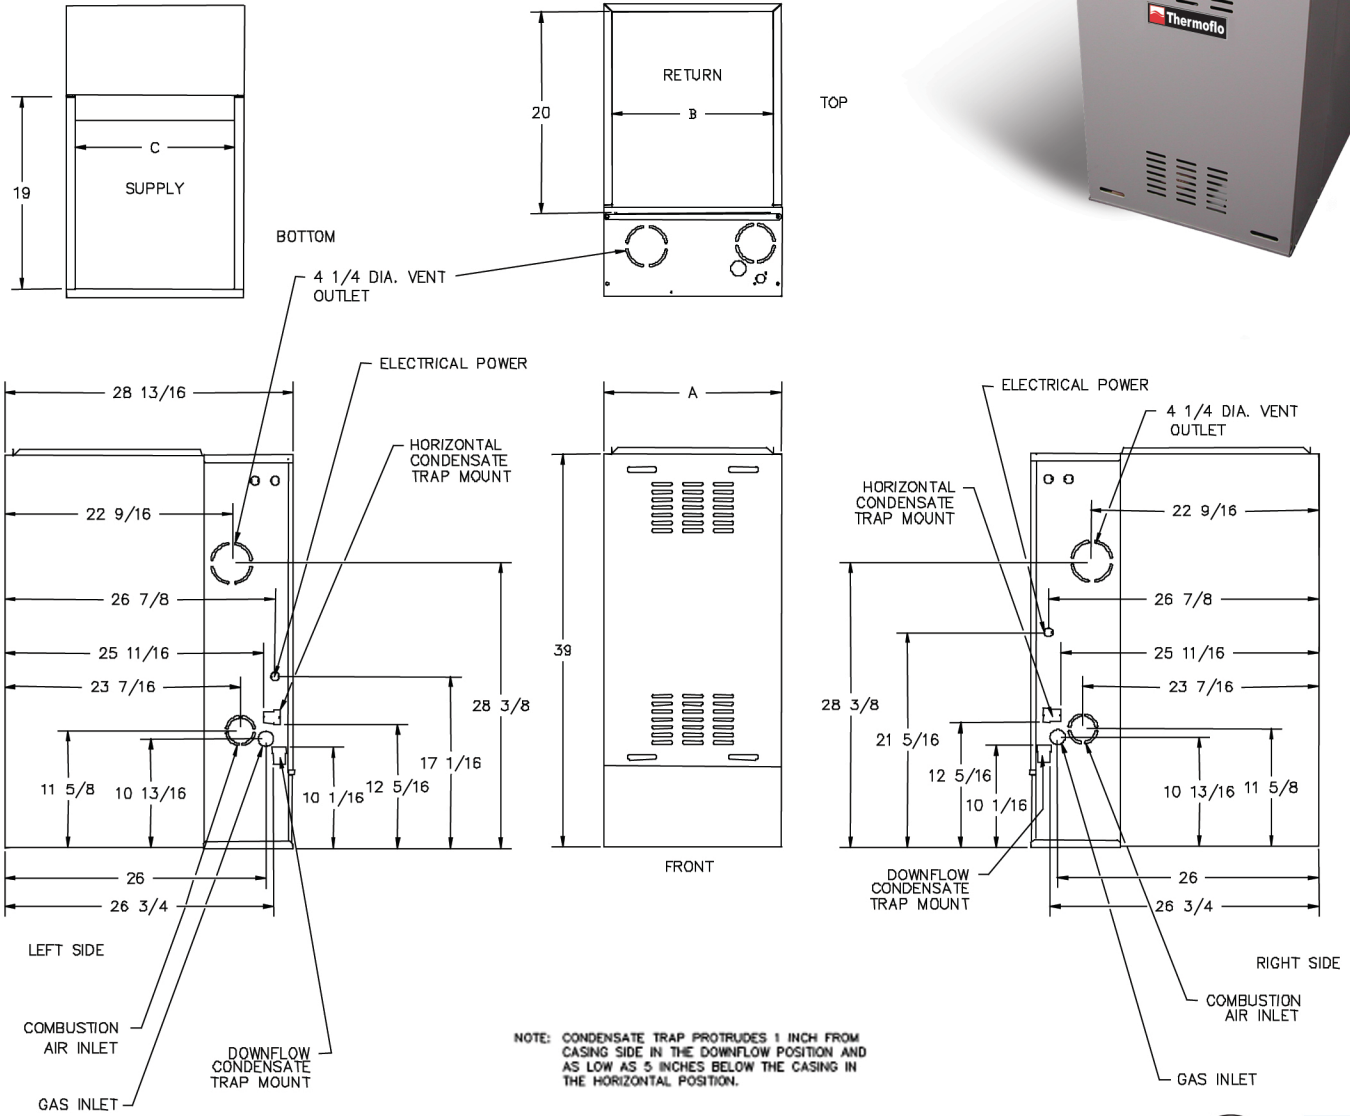

Model	BTUH (input)	BTUH (output)	Max Cooling Tons	Blower (Direct Drive)		Shipping Weight (lbs)	Cabinet Width (A)	Plenum Openings				High Speed CFM @ 0.5 Inches W.C.	Vent Size Inches*	
				Motor (HP)	Size			Supply (C)		Return (B)			Intake	Exhaust
								Width	Depth	Width	Depth			
WTCSA054NH3R	54,000	48,900	3	1/3	10-6	122	17 1/2"	15 3/4"	18 15/16"	15 15/16"	18 7/8"	1,213	2	2
WTCSA072NH3R	72,000	65,200	3.5	1/2	10-8	131	17 1/2"	15 3/4"	18 15/16"	15 15/16"	18 7/8"	1,391	2 or 3	2 or 3
WTCSA072NH4R	72,000	65,200	4	3/4	Dual 10-4	141	20 1/2"	18 3/4"	18 15/16"	18 15/16"	18 7/8"	1,548	2 or 3	2 or 3
WTCSA090NH3R	90,000	81,400	3.5	1/2	10-8	145	17 1/2"	15 3/4"	18 15/16"	15 15/16"	18 7/8"	1,360	2 or 3	2 or 3
WTCSA090NH4R	90,000	81,400	4	3/4	Dual 10-4	150	20 1/2"	18 3/4"	18 15/16"	18 15/16"	18 7/8"	1,682	2 or 3	2 or 3
WTCSA108NH5R	108,000	97,700	5	3/4	Dual 10-6	174	23 1/2"	21 3/4"	18 15/16"	21 15/16"	18 7/8"	1,887	3	3
WTCSA126NH5R	126,000	114,000	5	3/4	Dual 10-6	193	23 1/2"	21 3/4"	18 15/16"	21 15/16"	18 7/8"	1,828	3	3

*Vent size will depend upon vent length and number of elbows. Please review installation manual.