

# Williamson

# SCL

Series 2

## Sealed Combustion Oil Furnaces


*Low Boy Design*

### Ratings - 2 sizes

70,000 to 159,600 Btuh Input

0.50 to 1.14 GPH #2 Fuel Oil

- ▣ AFUE's to 82.2%
- ▣ Sealed Combustion
  - No chimney required
  - Positive draft
  - Utilizes outside combustion air
- ▣ Heat exchanger
  - Heavy gauge "wrap-around" design
  - Rear flue
  - Large front clean-out port secured with studs and nuts
  - Flame view port
- ▣ Blower
  - Multi-speed direct drive
- ▣ Cabinet
  - Appliance finish powder coat paint
  - Heavy gauge with "Seal-Tite" construction
  - Foil-faced insulation for hand-cool surface
- ▣ Burner and controls
  - Factory-wired with simple plug-in connections
  - PSC motor
  - Solid state ignitor

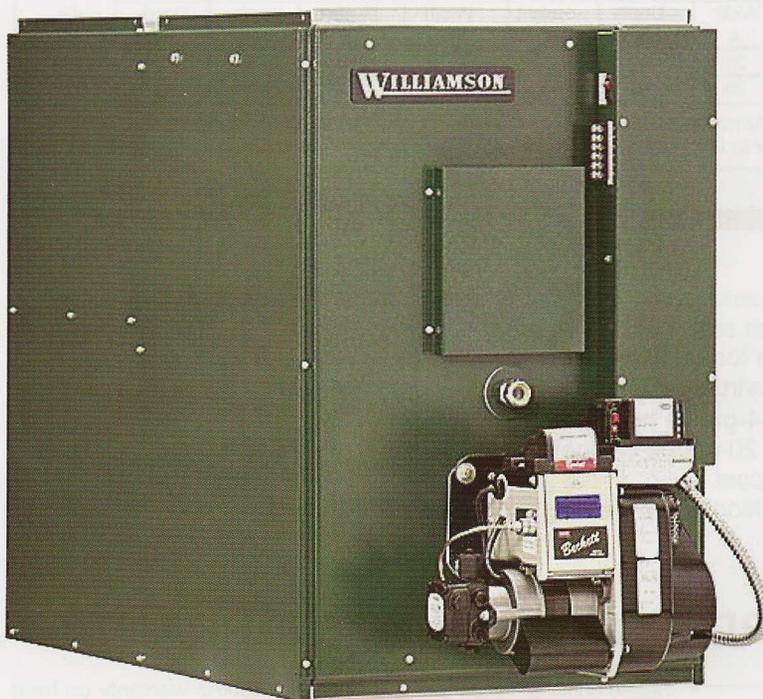

### Accessory kits:



IFV Insulated Flex Vent



VTK Vent Termination Kit



## Williamson

*Since 1890*

# RATINGS

Model	Input	Output	Firing rate	AFUE %	Blower Size (in.)	Blower Motor HP/Speeds	Maximum Cooling Capacity	Blower CFM with filter		Ship Wt. (lbs)
	(Btuh)	(Btuh)	(USGPH)					@ 0.25" WC	@ 0.50" WC	


## Direct Drive Units

SCL-105	70,000	59,800	0.50	81.5	10 x 10	0.50 / 4	3.0 tons	960	920	200
	88,200	74,500	0.63	81.0			with high	960	920	
	100,800	83,900	0.72	80.3			blower	1,100	1,000	
	105,000	87,800	0.75	80.3			speed	1,100	1,000	
SCL-160	119,000	97,000	0.85	82.2	12 x 10	0.85 / 4	5.0 tons	1,350	1,310	260
	135,800	110,000	0.97	81.5			with high	1,350	1,310	
	159,600	127,000	1.14	80.3			blower speed	1,605	1,510	

Note: Filter sizes required: SCL-105 - (1) 20" x 20" • SCL-160 - (2) 16" x 24"

# DIMENSIONS

ALL DIMENSIONS IN INCHES

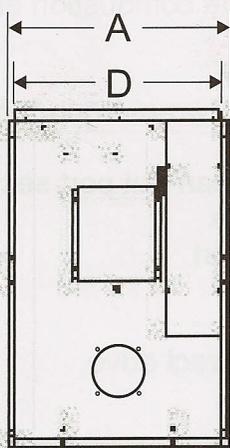


FRONT VIEW

Model	Furnace Casing			Warm Air Supply (top)		Return air (top)		Flue pipe dia.
	Width A	Depth B	Height C	Width D	Depth K	Width R	Depth S	
SCL-105	21	47	32	19-3/4	19-3/4	17-3/4	19-3/4	3
SCL-160	25	55	40	23-3/4	23-3/4	21-3/4	23-3/4	4

Note: SCL furnaces are CSA design certified for installation on combustible flooring. Refer to installation manual for details and proper installation.

# EQUIPMENT

- Factory-assembled
- Hot-rolled steel heat exchanger, pressure tested to assure leak-tight construction
- Heavy 14-gauge heat exchanger
- Rugged 20-gauge cabinet with powder coat finish
- Air conditioning fan center
- Electrical box with external low-voltage terminal strip
- Filter rack
- High-efficiency flame retention burner
- Each unit requires:
  - ▶ VTK Vent Termination Kit
  - ▶ IFV Insulated Flex Vent

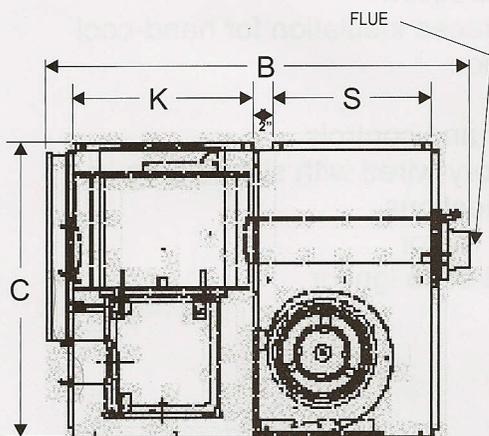

SIDE VIEW

# ORDER CODE

# WARRANTY

Sealed Combustion Low Boy  
 Input in MBH  
 Blower Type DD=Direct Drive  
 R=Rear Flue  
 Series 2  
 Burner: B=Beckett  
 X=No burner

160  
 SCL - 105 - DD - R - S2 - B - W

- Limited lifetime warranty on heat exchanger
- 5-year limited warranty on parts
- Optional 5- or 10-year parts and labor warranty



8201 West Calumet Road • Milwaukee, WI 53223

[www.williamson-thermoflo.com](http://www.williamson-thermoflo.com)

Form No. W-112(1206)

